

# Metallized film capacitor

**FPCS** SERIES

Please request specifications for consideration.  
If you send the email to "Contact us", we will send it.

## Boxed type Small(450VDC)

### ★ Performance

Item	Performance
Temperature range	-40~+85°C (+110°C) (Derate the voltage at +85~+110°C) (Derate effective current at +100~+110°C.)
Rated Voltage ( $U_R$ )	450V <sub>DC</sub>
Capacitance range	0.47 ~ 4.7 $\mu\text{F}$
Capacitance tolerance	$\pm 10\%$ (K)
Insulation resistance (IR)	$\geq 7500 \Omega \cdot \text{F}$ ( 100 VDC for 1min)
$\tan\delta$	$\leq 0.002$ (1kHz)


## Metallized PP film capacitor




### ★ Standard dimensions table (FPCS)

Parts cord	Rated voltage (V <sub>DC</sub> )	Capacitance ( $\mu\text{F}$ )	Cap. tolerance (%)	Dimensions (mm)					Permissible Current (Peak) I <sub>op</sub> (A)
				A max	B max	L max	P ±0.5	ϕd	
FPCS2W474K1L10R	450	0.47	±10	5.0	12.0	13.0	10.0	0.6	13.7
FPCS2W684K1L10R		0.68		5.5	14.0	13.0	10.0	0.6	19.8
FPCS2W105K1L10R		1.0		6.5	16.0	13.0	10.0	0.6	29.2
FPCS2W155K1L10R		1.5		8.0	17.5	13.0	10.0	0.6	33.5
FPCS2W105K1L15R		1.0		6.0	12.5	17.8	15.0	0.8	12.5
FPCS2W225K1L15R		2.2		9.0	15.0	17.8	15.0	0.8	27.6
FPCS2W475K1L15R		4.7		13.0	19.0	17.8	15.0	0.8	59.0


### ■ Component outline

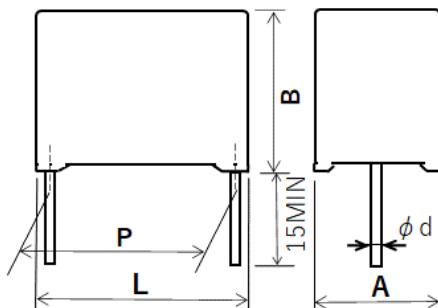



### ■ Derating Voltage at high Temperature

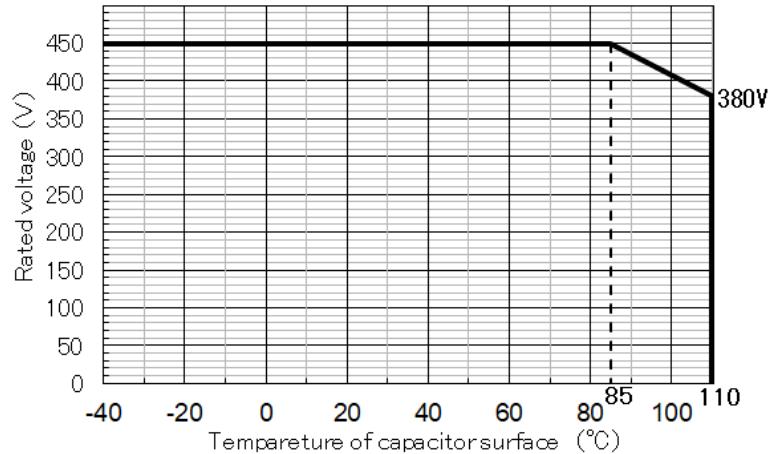

# Metallized film capacitor

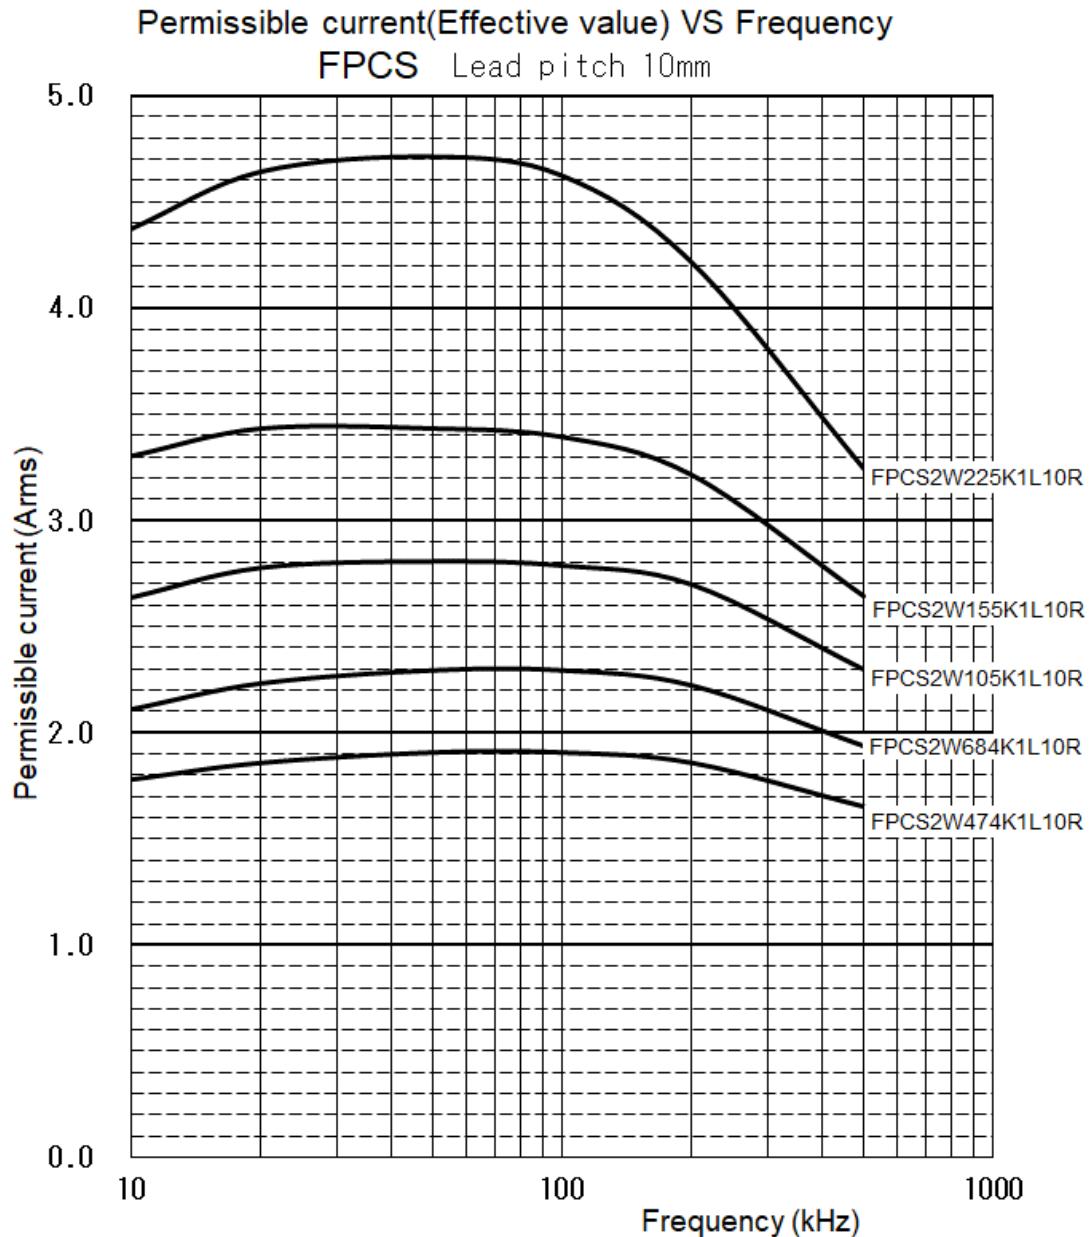


If the surface temperature of the capacitor is + 100 ~ + 110°C, use it with the following derating.

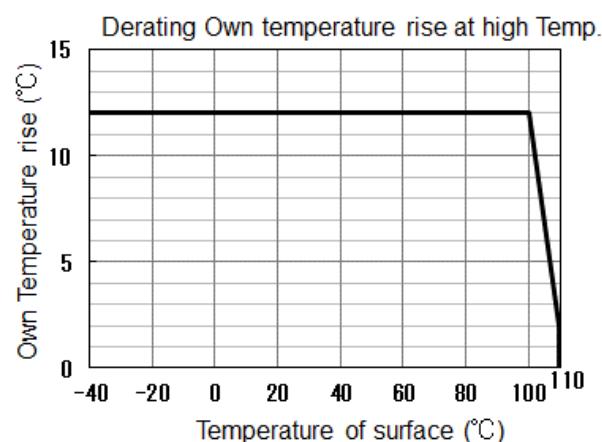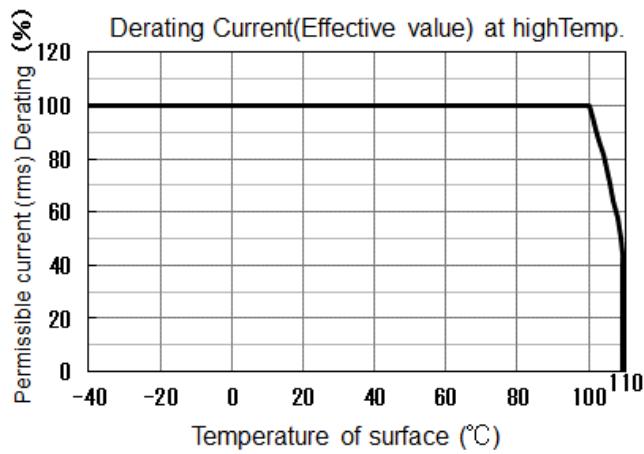

# Metallized film capacitor

## Permissible current(Effective value) VS Frequency

FPCS Lead pitch 15mm

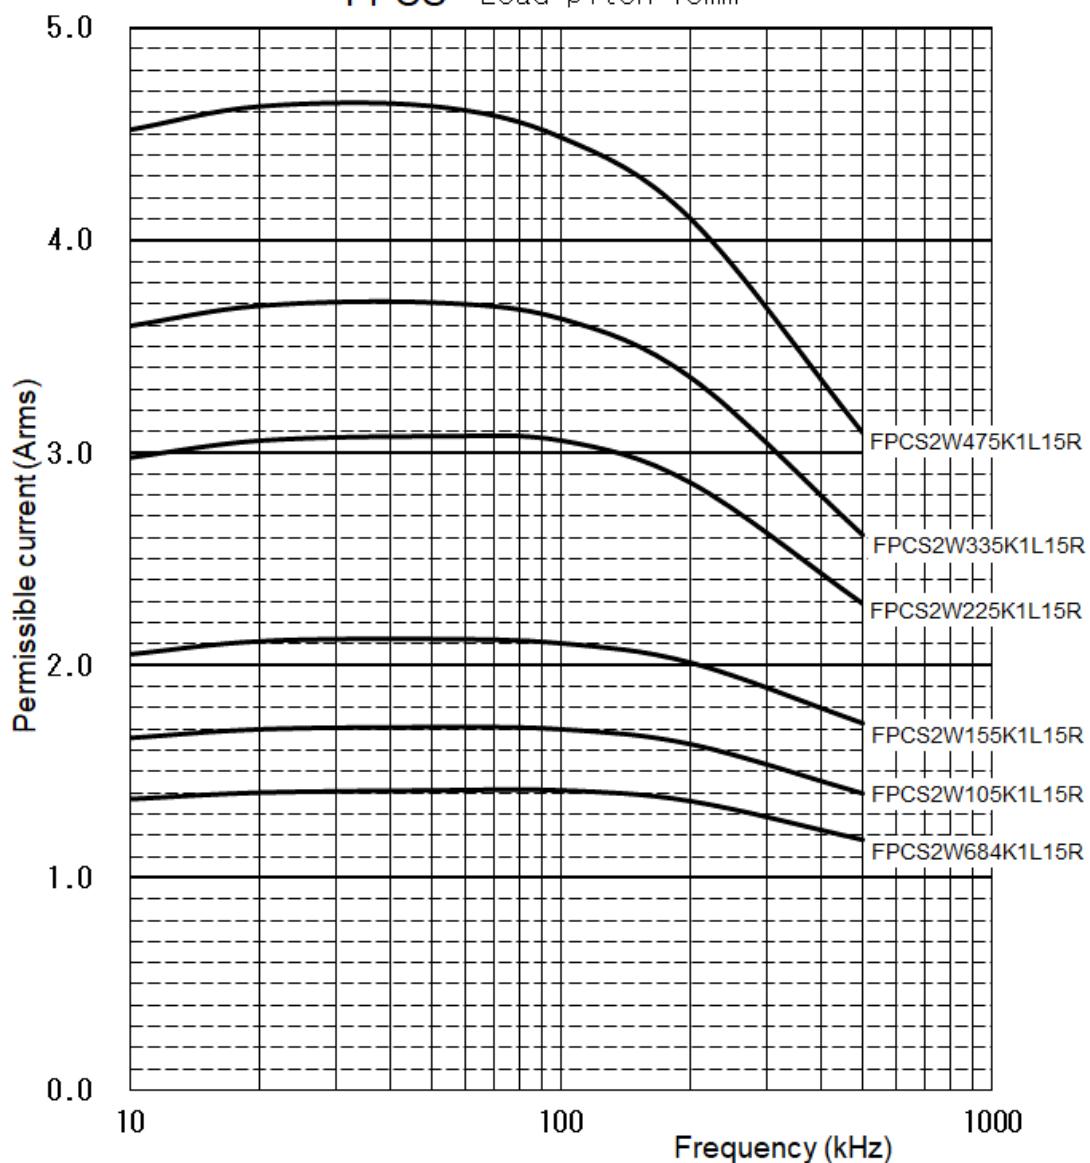

If the surface temperature of the capacitor is + 100 ~+ 110°C, use it with the following derating.

